


INSTALLATION INSTRUCTIONS

ADJUSTABLE BALL MOUNT






PART NUMBER: 6580

MAX LOADS LOWER OF VEHICLE/RECEIVER SPEC. OR GROSS TRAILER WEIGHT 6000 LB. TONGUE WEIGHT 600 LB. 1" BALL THD. ONLY. BEFORE EVERY TOW CHECK 5/8" PIN, CLIP AND BALL TIGHTNESS.

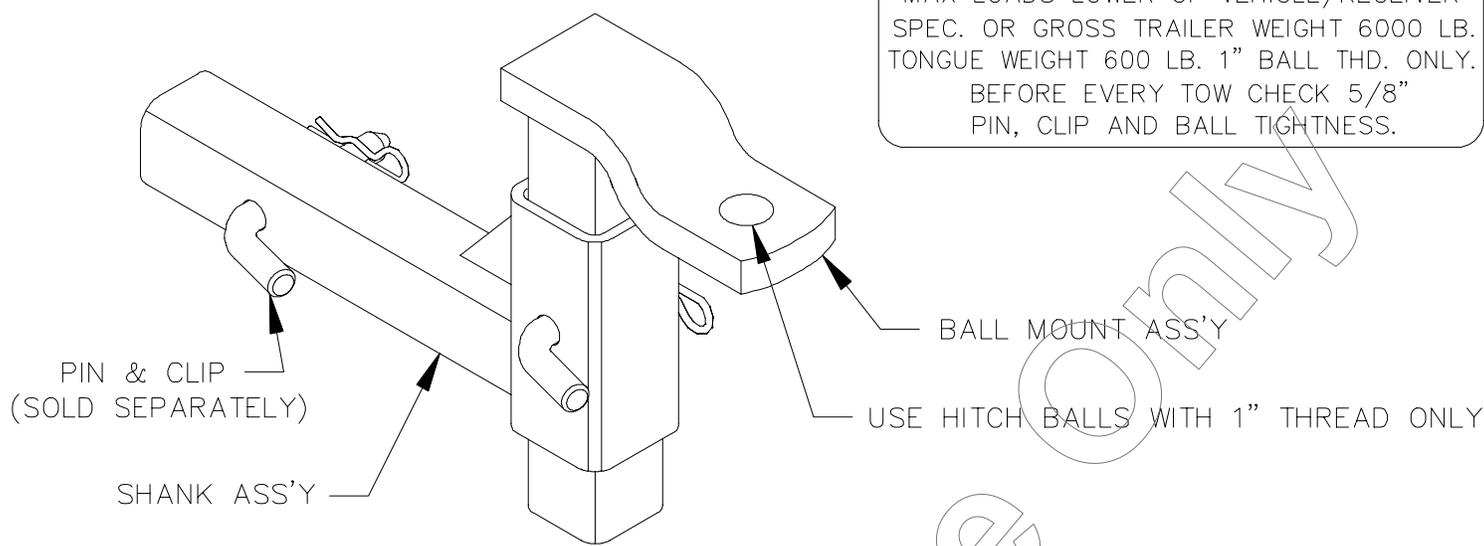

1. INSERT SHANK ASS'Y INTO HITCH RECEIVER AND ATTACH PIN & CLIP (SOLD SEPARATELY).
2. INSERT BALL MOUNT ASS'Y INTO THE SHANK ASS'Y, ADJUST TO PROPER HEIGHT AND ATTACH PIN & CLIP (HEIGHT ADJUSTMENT IS IN INCREMENTS OF 1.50 INCHES).

NOTE: SEE FIGURE 1 FOR MAXIMUM DROP POSITION AND FIGURE 2 FOR MAXIMUM RISE POSITION. DO NOT POSITION AS SHOWN IN FIGURE 3.

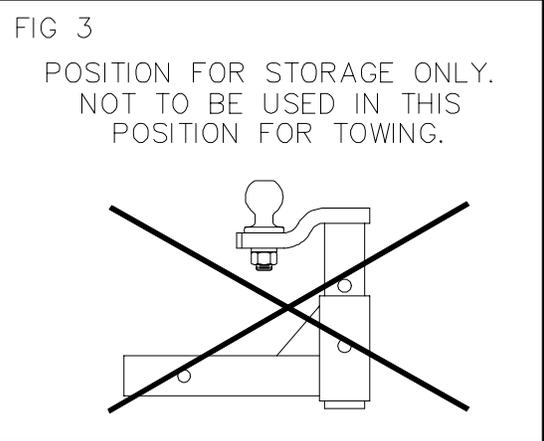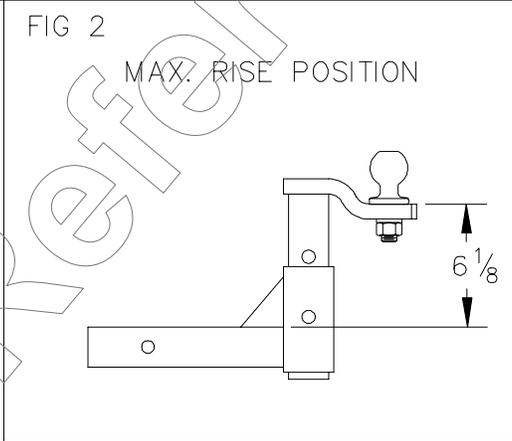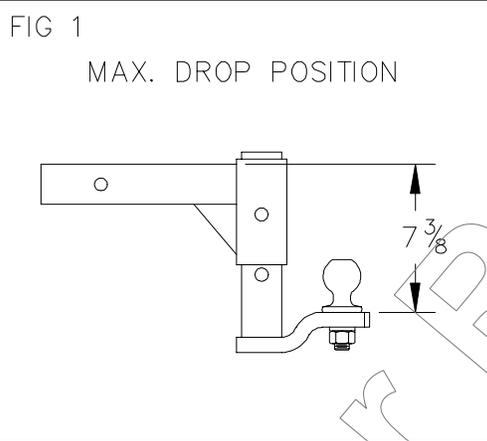

NOTE: CHECK FOR PROPER BALL MOUNT HEIGHT WITH VEHICLE & TRAILER LOADED FOR TRAVEL. AT PROPER ADJUSTMENT THE TRAILER COUPLER & TONGUE SHOULD BE LEVEL WITH THE GROUND. (SEE FIGURE 4)

